


PRODUCT DATASHEET

PPC SUREWALL 22,5 X CEMENT

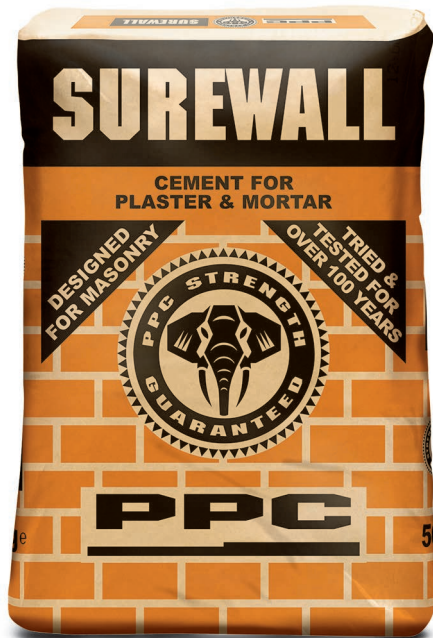

PPC

PPC SUREWALL 22,5 X CEMENT IS A MASONRY CEMENT DESIGNED TO ENHANCE THE PERFORMANCE OF MORTAR AND PLASTER MIXES.

Product Description

SUREWALL 22,5 X is a masonry cement made from high quality raw materials.

Applications

SUREWALL masonry cement is ideal for mortar and plaster applications and improves the following properties of fresh mortar and plaster:

- Workability
- Cohesiveness
- Water retention

In hardened plaster it reduces cracking and crazing and improves the surface finish.

NOTE: DO NOT USE FOR CONCRETE APPLICATIONS.

Specification

SUREWALL complies with the 22,5 strength class of SANS 50413-1 for masonry cements and is identified as:

- MC 22,5 X

Where "MC" denotes Masonry Cement, "22,5" denotes the 22,5 MPa strength class, and "X" denotes that the product does not contain an air-entraining agent.

Storage

Cement bags are not weatherproof and should be stored under cover, off the ground, on a raised timber platform or on plastic sheeting to protect against rising dampness. Bags should be stacked to a maximum height of 12 bags or two pallets. Usage of bags should be first in first out.

Handling and Safety

Refer to PPC Safety Data Sheet at www.ppc.africa.

Technical Information

Typical technical data is supplied on the next page. Further technical information can be obtained from the PPC Cement office on (0800) 236 368.

PPC has comprehensively equipped chemical, cement and concrete laboratories and can supply specific information and assistance regarding cement and concrete technology.

Typical Properties

Chemical Properties	Typical results	SANS 50413-1 requirements
Sulphur trioxide: % by mass	2,1	3,5% maximum
Chlorides: % by mass	< 0,01	0,1% maximum

Physical Properties	Typical results	SANS 50413-1 requirements
Setting times:		
Initial: minutes	300	≤ 60 minutes
Final: minutes	400	< 15 hours max if initial set > 6 hours
Specific Area (Blaine): m ² /kg	400	No requirement
Fineness: Residue on 90 μm screen %	10 - 12	15% max
Air content by volume	3	≤ 6
Water retention: % by mass	80	≤ 75
Typical mortal prism results determined in accordance with SANS 50196-1:		
Compressive strength at 7 days (MPa)	± 20	≤ 10,0
Compressive strength at 28 days (MPa)	± 30	≤ 22,5 ≤ 42,5
Soundness:		
Le Chatelier Expansion (mm)	0	10 maximum
Densities:		
Relative density	3,00	
Bulk density, aerated, kg/m ³	1300	
Bulk density, as packed, kg/m ³	1500	
Approximate Volume: 50 kg bag, ℓ	± 33	

Please contact our sales office if actual figures are required.

CONTACT US:

JOHANNESBURG

Eastgate 20, Corner Crayston Drive and Katherine Street 148, Sandton
Tel: 011 386 9000

GERMISTON

62 Lower Germiston Rd, Heriotdale, Johannesburg South
Tel: 011 626 3150

CAPE TOWN

Corner of Chain Ave & Montague Drive, Montague Gardens, Milnerton
Tel: 021 550 2100

GEORGE

13 Saagmeul Street, George Industrial
Tel: 044 871 3024

PPC BOTSWANA

Plot 22034, Takatokwane Way Gaborone West,
Tel: (267) 390 1553

IMPORTANT NOTE:

The information and/or specifications contained herein are given in good faith as being true and accurate but no liability is accepted by PPC, its employees, distributors, representatives or agents, for any loss or damage, direct or indirect, resulting from using the information, following the specifications or adopting recommendations and/or suggestions as actual conditions of use are beyond its control.

This data sheet was published in August 2018

Visit our website at: www.ppc.africa



PPC